

# BSL Gas Technologies Limited

Mixing Knowledge and Resource Delivering Thought Provoking Industrial Gas Solutions




## Uniblender Range



For the perfect pint many brewing organisations dictate the conditions in which the beer should be dispensed. The quality and percentage of CO<sub>2</sub> in the dispense gas for many is vital.

Designed specifically for the smaller outlet BSL Gas Technologies Limited the Uniblender combines primary pressure regulators and gas mixing valve.

Rated at 20 slpm of mixed gas the Uniblender dispense system is a compact wall mounted distribution system that can be easily installed in the pub cellar.

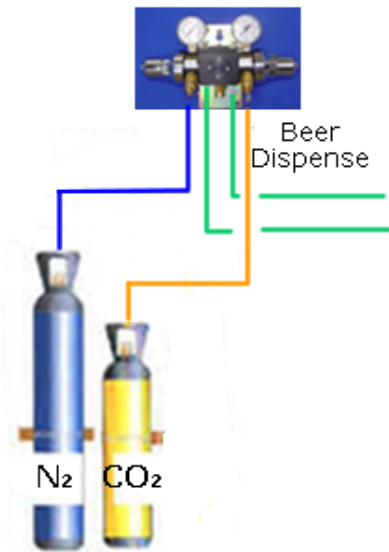

1. General Details		2. Design Details	
Product Name	Uniblender	Dimensions mm	170 x 260 x 95
Product Details	UB00001	Weight (kgms)	2.5 kg
Gases Suitable	Inert gases and O <sub>2</sub> < 25%	Inlet Pressure of gases	220 bar g
Flow Capabilities	20 litres per minute	Outlet Connections	3/8" or 8 mm
Manufacturer	BSL Gas Technologies Limited	Outlet Pressure	Inlet gas less 2 bar g
Telephone	++ 44 1634 661100	Design Pressure	220 bar
Facsimile	++ 44 1634 671111	Temperature Range	-10 to +50 deg C
email	Info@bslgastech.com		

3. Main Features	4. Benefits
Accurate gas mixer	Provides options on mode of supply
Provides a variable flow of gas to match demand	No need for gas buffer tank
Integrated high pressure regulators	Very compact, stand alone system
Is a completely pressure/mechanical design	No need for electrical supply
Has safety interlock built-in	Will only pass a mix of gas
Mix is factory set	Mix setting is tamperproof
Very robust construction with no moving /wearing parts	Requires little maintenance or re-calibration

BSL Gas Technologies Limited  
No 101 Laker Road, Rochester Airport Industrial Estate  
Rochester, Kent ME1 3QX



Tel ++ 44 1634 661100 Fax ++ 44 1634 671111  
Email info@bslgastech.com www.bslgastech.com