


BSL Gas Technologies Limited

Mixing Knowledge and Resource Delivering Thought Provoking
Industrial Gas Solutions



BOC SUREBLEND ULTRA

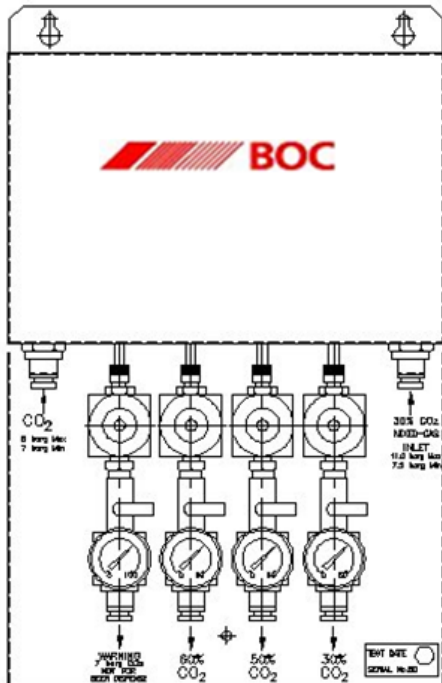

Manufactured in Zintec and finished gloss white the panels are extremely easy to install. All pipe work connections are suitable for 3/8" diameter tubing. Fittings are the push in variety for ease of installation.

Slightly larger and heavier than the basic Sureblend the Sureblend Ultra includes isolating valves and pressure indication on each outlet and has an additional outlet for soft drinks dispense. The soft drinks dispense outlet is also supplied with dual protection pressure relief valves rated accordingly

Features include

- Lightweight design
- Wall mounted installation
- Quick fit couplings
- Patented mixing valve
- Manufactured to conform to pub cellar codes of practice
- The panel is designed for CO₂ and a CO₂/N₂ mixed gas supply.
- CO₂ needs to be supplied at between 5 barg and 6 barg
- The CO₂/N₂ mixed gas needs to be supplied at between 5.5 barg and 7 barg
- Regulator is supplied for each mixed gas outlet
- Isolating valve and gauge supplied for each outlet
- Dual Protection Pressure Relief Valve
- Inlet and Outlet Connections 3/8" tube

Mixtures are pre-set at 30% + 50% and 60% CO₂

This system greatly reduces the complexity of gas cylinder delivery and handling. The Sureblend Ultra provides a very effective, low cost solution for beer and soft drinks dispense in pub cellars.

BSL Gas Technologies Limited
No 101 Laker Road, Rochester Airport Industrial Estate
Rochester, Kent ME1 3QX



Tel ++ 44 1634 661100 Fax ++ 44 1634 671111
Email info@bslgastech.com www.bslgastech.com